




| 1.2" 2.4/35mm C                           |            | 1.2"                | 1.1"        | 1"              |
|-------------------------------------------|------------|---------------------|-------------|-----------------|
| FOCAL LENGTH                              |            | f=35mm              |             |                 |
| F-NUMBER                                  |            | F=1:2.4,2.8,4,5,6,8 |             |                 |
| PICTURE SIZE                              |            | 11.5×15.4mm         | 10.6×14.1mm | 9.6×12.8mm      |
| ANGLE OF VIEW<br>(∞)                      | VER. ANGLE | 18.7°               | 17.3°       | 15.7°           |
|                                           | HOR. ANGLE | 25.0°               | 22.9°       | 20.8°           |
|                                           | DIA. ANGLE | 31.0°               | 28.5°       | 26.0°           |
| DISTORTION (TV)                           |            | -0.3%               |             |                 |
| FIELD OF VIEW<br>(MINIMUM FOCUS DISTANCE) | VER.       | 165mm               | 152mm       | 137mm           |
|                                           | HOR.       | 222mm               | 203mm       | 184mm           |
|                                           | DIA.       | 278mm               | 255mm       | 231mm           |
| MINIMUM FOCUS DISTANCE                    |            | 0.5m                |             |                 |
| FLANGE BACK                               |            | 17.526mm in air     |             |                 |
| BACK FOCUS                                |            | 14.72mm in air      |             |                 |
| FILTER SCREW SIZE                         |            | M30.5×0.5           |             |                 |
| FRONT/REAR EFFECTIVE DIA.                 |            | FRONT φ21.0mm       |             | REAR φ17.3mm    |
| MOUNT                                     |            | C-MOUNT             |             |                 |
| EXIT PUPIL                                |            | -50.8mm             |             |                 |
| TEMPERATURE RANGE                         |            | -10~+50°C           |             |                 |
| STORAGE TEMPERATURE RANGE                 |            | -20~+60°C           |             |                 |
| RESOLUTION CENTER/CORNER                  |            | CENTER 200lp/mm     |             | CORNER 125lp/mm |
| WEIGHT                                    |            | 80 g                |             |                 |

NOTE: Specifications and availability are subject to change without notice  
 注) 本仕様については、予告なしに変更する場合があります。

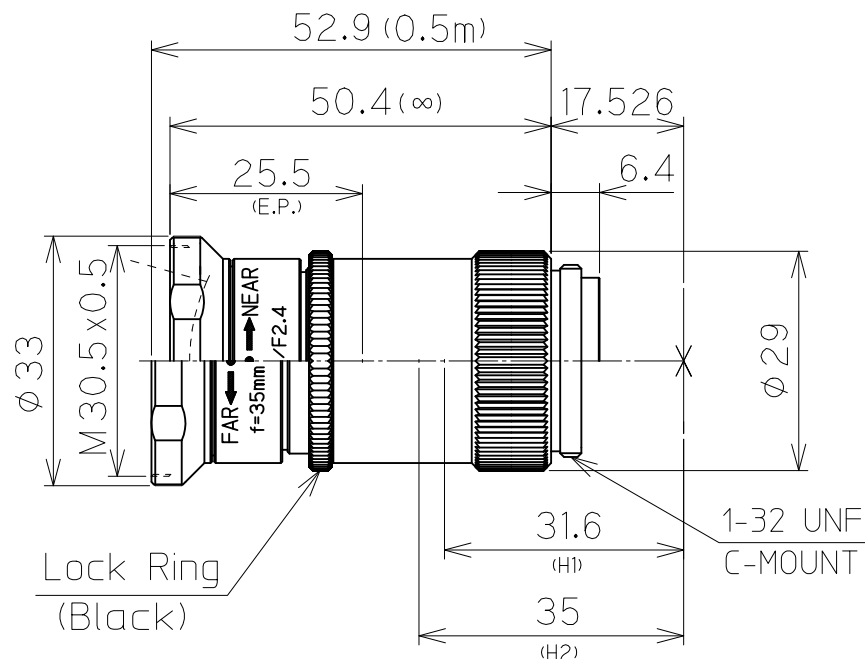

|            |       |             |                  |          |           |
|------------|-------|-------------|------------------|----------|-----------|
|            |       | 尺<br>度      | 1/1              | 工場<br>番号 | LM35EC-IR |
|            |       | 機<br>種<br>名 | 1.2" F2.4 f=35mm |          |           |
|            |       | 機<br>種<br>番 | LM35EC-IR 外観図    |          |           |
| 2024.09.16 | 作成年月日 |             |                  |          |           |